

SOLIDEAL RES 330

BY CAMSO



RESILIENT



LONGEST LASTING TIRE IN THE INDUSTRY FOR LOW INTENSITY APPLICATIONS

Best-in-class tire for low-intensity applications*. A high performing tread rubber compound makes this tire a unique long lasting tire. Wide, aggressive tread with natural rubber compounds extends its life while resisting cutting and chunking. A steel-bead reinforced heel means the tire won't slip on the rim.

camso.co

INTENSITY USAGE



PERFORMANCE



ENERGY SAVINGS



TIRE LIFE



COMFORT



FORMERLY
CAMOPLAST
SOLIDEAL

RESILIENT

SOLIDEAL RES 330

BY CAMSO

INTENSITY USAGE



TIRE SIZE	RIM SIZE ⁽¹⁾	HEEL		ACTUAL TIRE DIMENSIONS		WEARABLE HEIGHT	LOAD CAPACITY ⁽²⁾ Counterbalanced lift trucks (kg)	
				OVERALL DIAMETER	OVERALL WIDTH		Load wheel	Steering wheel
		NORMAL	QUICK	(mm)	(mm)	(mm)	Up to 25 km/h (kg)	Up to 25 km/h (kg)
5.00-8	3.00D-8	■	■	450	115	41	1415	1090
15x4 1/2-8 (150/75-8)	3.00D-8	■	■	370	116	28	1040	800
16x6-8 (150/75-8)	4.33R-8	■	■	409	146	34	1495	1150
18x7-8 (180/70-8)	4.33R-8	■	■	445	148	40	2145	1650
6.00-9	4.00E-9	■	■	519	136	48	1885	1450
21x8-9 (200/75-9)	6.00E-9	■	■	515	181	48	2755	2120
200/50-10	6.50F-10	■	■	450	193	33	2470	1900
6.50-10	5.00F-10	■	■	566	153	52	2340	1800
23x9-10 (225/75-10)	6.50F-10	■	■	573	200	53	3445	2650
23x10-12 (250/60-12)	8.00G-12	■	■	577	234	45	3770	2900
27x10-12 (250/75-12)	8.00G-12	■	■	664	248	60	3900	3000
7.00-12	5.00S-12	■	■	645	165	56	2920	2240
28x9-15 (8.15-15 & 225/75-15)	7.00-15	■	■	681	211	49	3445	2650
355/45-15 (28x12.5-15)	9.75-15	■	■	675	292	48	5690	4375
355/65-15 (32x12.1-15)	9.75-15	■	■	811	310	70	7800	6000
250-15 (250/70-15)	7.00-15	■	■	707	212	53	4750	3650
300-15 (315/70-15)	8.00-15	■	■	808	250	70	5850	4500
7.00-15	5.50-15	■	■	721	185	55	3545	2725
7.50-15	6.50-15	■	■	743	203	59	3900	3000
8.25-15 (7.50-15(32))	6.50-15	■	■	804	203	69	4750	3650
10.00-20	8.00-20	■	■	1010	254	82	6000	5000

WELL BALANCED RUBBER COMPOUND

§ Operate in low intensity applications and offer the lowest operating cost

AGGRESSIVE DEEP TREAD DESIGN

§ Provide great traction and stability

EXCEPTIONAL TREAD RUBBER COMPOUND PROPERTIES

§ Make this tire the longest lasting tire in the industry for low intensity applications*

STEEL BEAD REINFORCED HEEL

§ Prevents rim slip

WEAR INDICATOR

§ Ensures maximum tire utilization



* Based on internal testing

Remarks

(1) Check rim for size, especially on width, as this should correspond to tirebase marking. Check also max. load of rim with rim manufacturer, as wheel load will be restricted by lowest load capacity, either the one given by the rim or by the tire.

(2) The speeds quoted in the table are the maximum speeds of the unloaded vehicle. An increase in load capacity for lower speeds is not permitted. Loads apply to cyclic service applications. Cyclic service means applications where there is a variation in load and/or speed.

For further details, please consult the technical department.


Loads are valid for intermittent service only. Intermittent service means a minimum load variation of 2.5. Does not include the additional weight of the solid tire when converting from pneumatics.

This document contains technical data of all products globally.

It is possible that certain items are not sold in your region.

Please contact your local sales contact to check tire availability in your region.

AUTHORIZED DISTRIBUTOR:

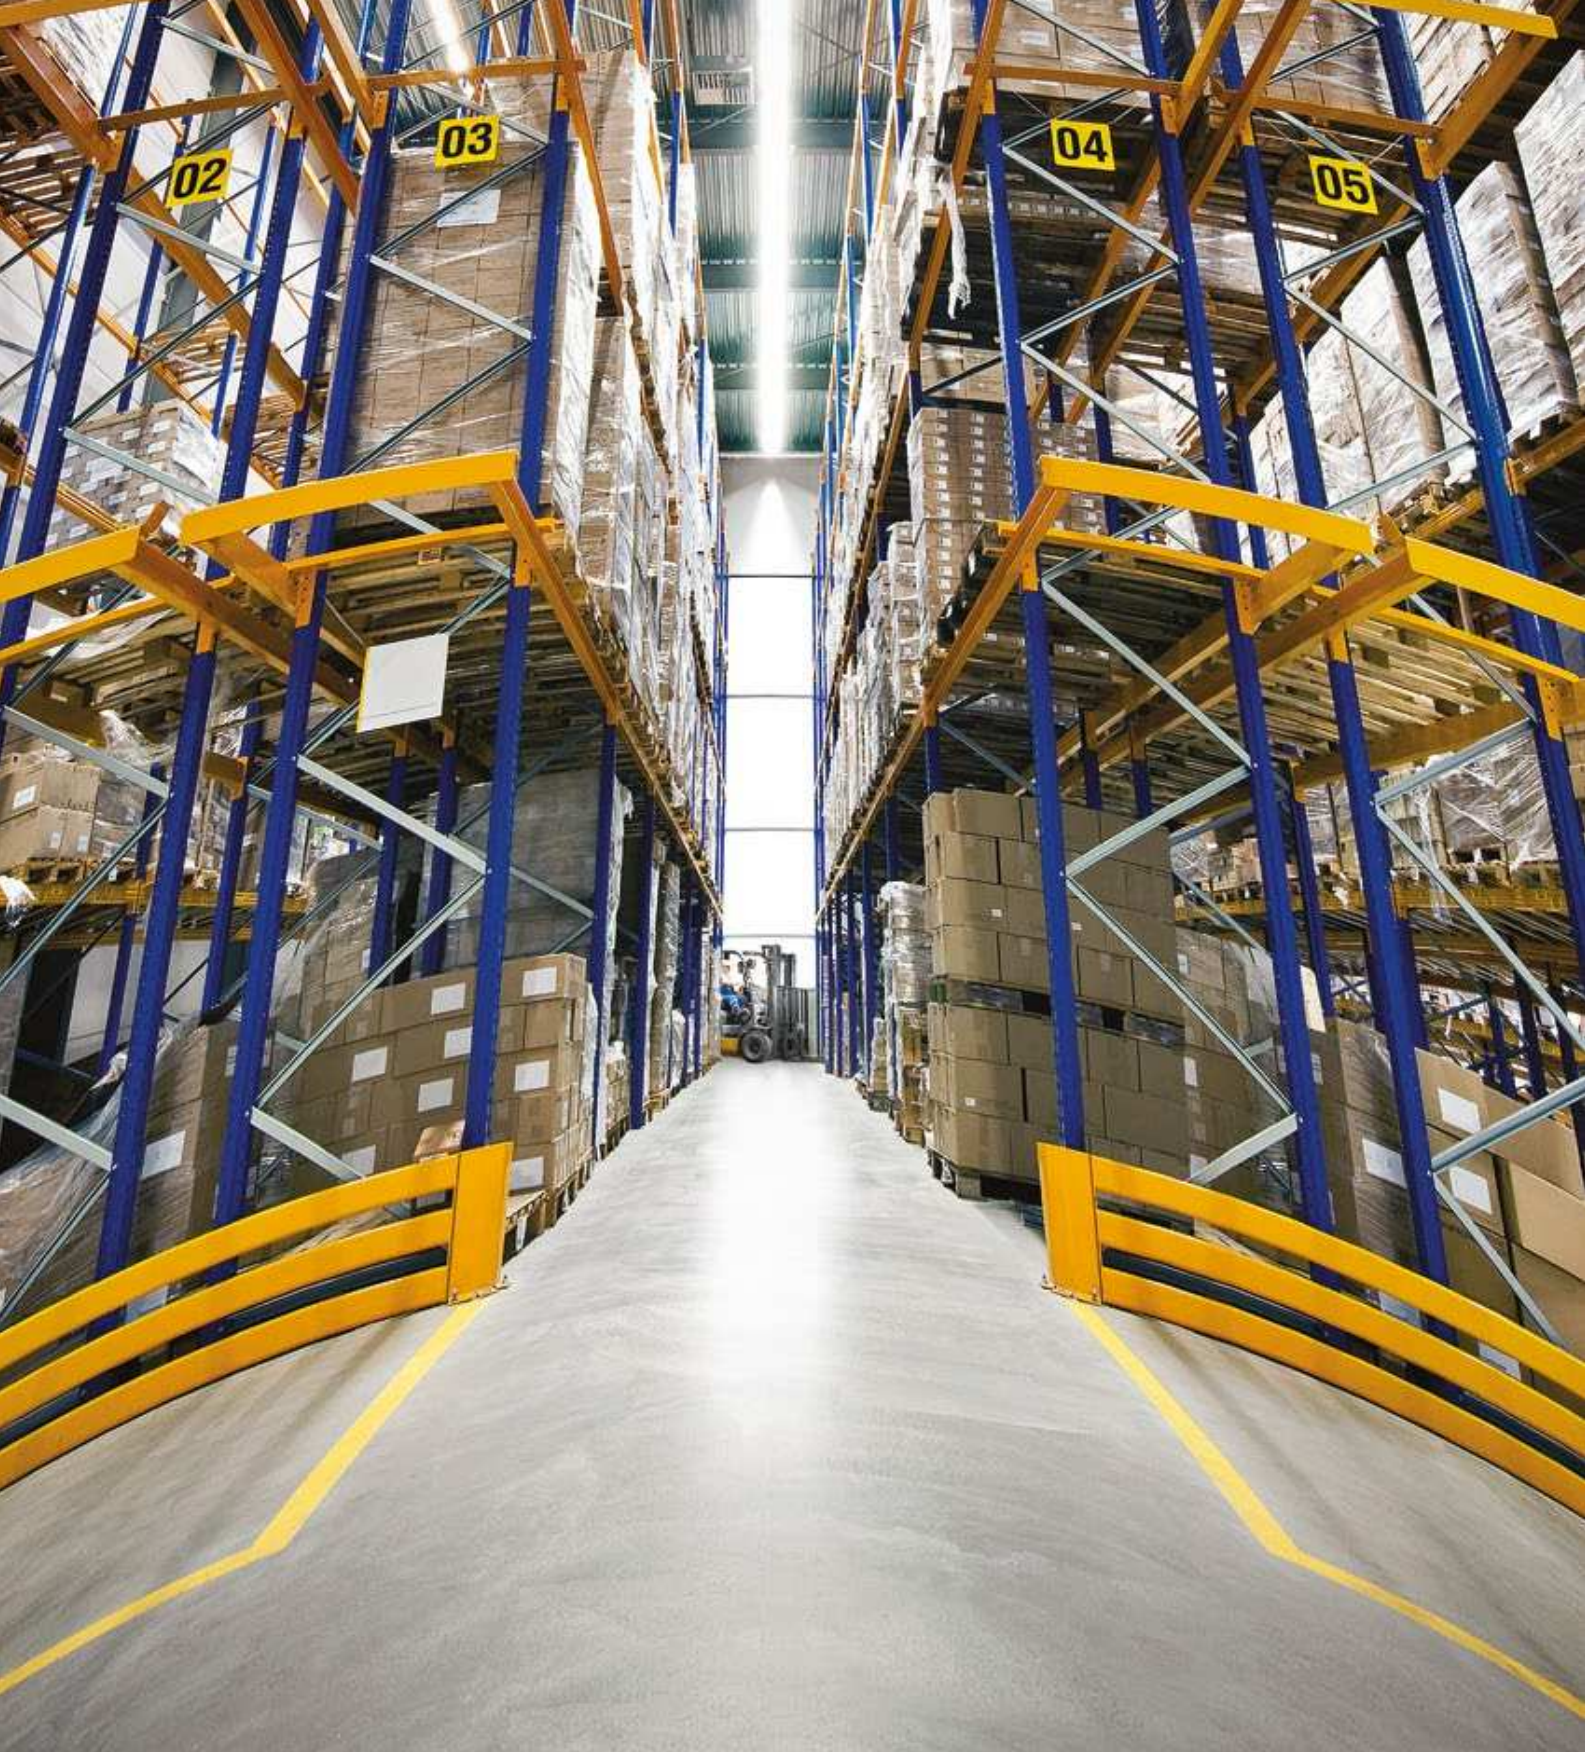

Camso is the best of Camoplast and Solideal.
To keep moving forward while staying true to our history,
we're now the Road Free company.

camsso.co



FORMERLY
CAMOPLAST
SOLIDEAL